



MISSOURI STAR
— QUILT CO. —

CUTE CAMPER

quilt pattern for 10" squares

54" x 64½"



CUTER CAMPER

Hit the road with the cutest little camper in tow and you'll be traveling in style wherever you roam! This darling glamper quilt is perfect for making your home away from home even cozier. Start your trip with 1 pack of 10" print squares, add a pack of 10" background squares, and soon you'll be heading off on your next adventure!

1 trace

Trace each of the shapes onto the paper side of the fusible web leaving a little room between the pieces so you are able to cut them apart easily. You will need to trace the camper body, roof, window #1, door, tire, hubcap, tow bar, and doorknob 20 times each. You can also choose to trace window #2, window #3, window #1 curtains, window #2 curtains, and the flags as many times as you wish to include them in your quilt top.

Roughly cut the pieces apart and organize them into piles of like shapes.

2 fuse & cut

Lay the black fabric right side down on your pressing surface. Lay out each of the 20 traced tires with the glue side of the fusible web touching the wrong side of the fabric. Adhere the fusible web to the fabric following the manufacturer's instructions. Cut the tires out on the traced line and set aside.

Repeat to adhere the traced tow bars and hubcaps to the wrong side of the gray fabric. After adhering, cut the shapes out along the traced line and set aside.


Use the 10" print squares and adhere the remaining pieces of traced fusible onto the reverse

side of the fabric. You may find it easiest to select the fabric for 1 block at a time. You can keep using the same 10" square as much as you like as long as there is enough fabric to cover your entire piece of fusible web. You may also choose to use any leftover gray or black fabric for these remaining pieces.

Note: A couple of our blocks have a stripe of a second fabric across the body that there is not a template shape for included in this pattern. We just traced the same camper body shape and trimmed it to the shorter height.

Once you have all the shapes needed for 1 block adhered to the fabric, peel the paper backing off and neatly cut each of the pieces. Lay a background square right sides up on your pressing surface. Arrange the shapes on top of the background square, being sure nothing is within a ¼" of the outside edge of the block. Shift the shapes around until you're happy with the arrangement.

2A



Follow the manufacturer's instructions for your fusible web and adhere the shapes to the background square. **2A**

3 appliqué

Note: If your sewing machine is equipped with a selection of decorative stitches, you can use those to embellish your camper a little bit. We used some decorative stitches on some of the blocks where the camper body meets the roof. We simply set our machine to the desired stitch and sewed across the block with the presser foot centered on where the fabric edges meet.

Stitch around all of the edges of the fused fabric using a blanket or small zigzag stitch. **3A**

Note: The flags are fused to the background fabric and sewn with a straight stitch across the top.

Make 20 blocks.

Block Size: 10" unfinished, 9½" finished

Note: To add a little variety, we made 12 of the blocks in the quilt point to the left and 8 point to the right. **3B**

4 cut & sew


From the blue fabric, cut (13) 1½" strips across the width of the fabric.

- Subcut 4 strips into 1½" x 10" vertical sashing rectangles. Each strip will yield 4 rectangles and a **total of 15** are needed. Set aside for the moment.
- Sew 9 strips together end-to-end to make 1 long strip. Trim this long strip into 6 horizontal sashing strips that are 41½" in length. Set the remainder of the strip aside for the inner border.



5 arrange & sew

Arrange the blocks into **5 rows** made up of **4 blocks** each.

3A



3B



Refer to the diagram on page 6 if needed. Add a vertical sashing rectangle between the blocks and sew together in rows. Press the seams toward the sashing rectangles.

Sew a horizontal sashing strip to the top of each row. Add the remaining sashing strip to the bottom of the bottom row. Sew the rows together to complete the quilt center.

6 inner border

Pick up the long strip you set aside for the inner border. Trim the inner borders from this strip. Make note that the top and bottom borders were sewn on in the previous section, so you only need to measure and attach the side borders.

Refer to Borders (pg. 10) in the Construction Basics to measure and cut the inner borders. The strips are approximately 54" long.



7 outer border

Cut (6) 6" strips across the width of the outer border fabric. Sew the strips together end-to-end to make 1 long strip. Trim the borders from this strip.

Refer to Borders (pg. 10) in the Construction Basics to measure and cut the outer borders. The strips are approximately 54" for the sides and approximately 54½" for the top and bottom.






8 quilt & bind


Layer the quilt with batting and backing and quilt. After the quilting is complete, square up the quilt and trim away all excess batting and backing. Add binding to complete the quilt. See Construction Basics (pg. 10) for binding instructions.

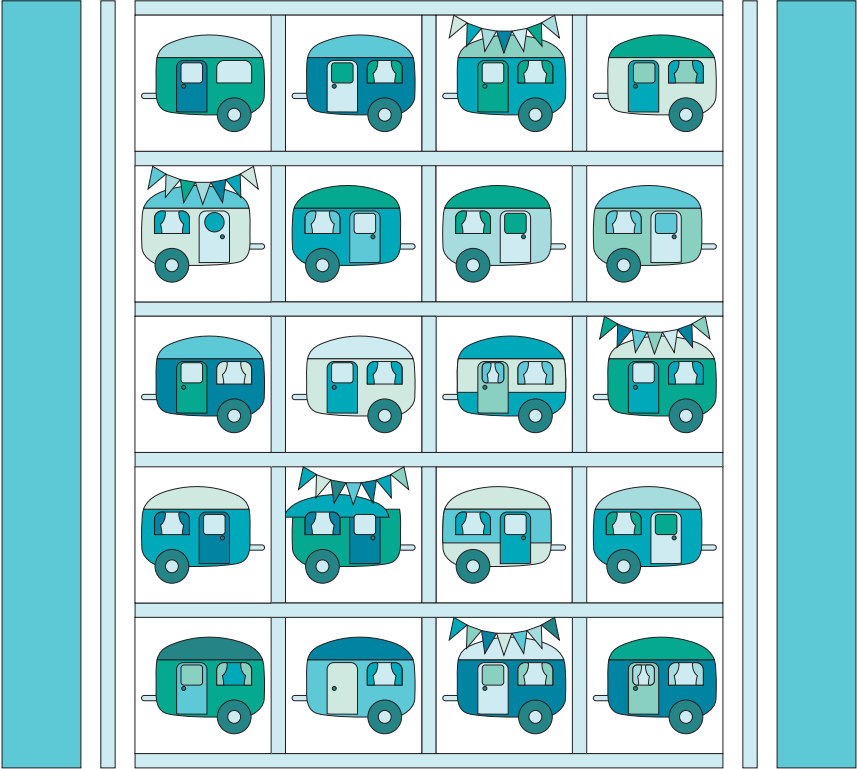



Camper Body

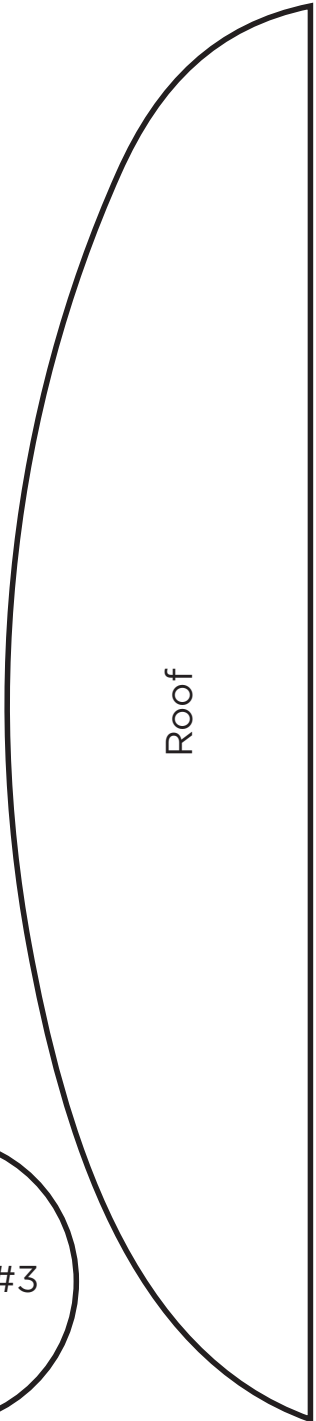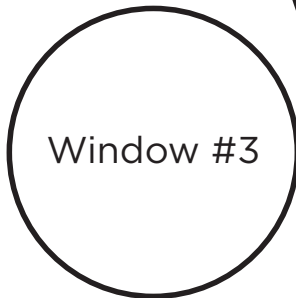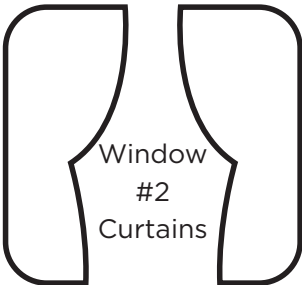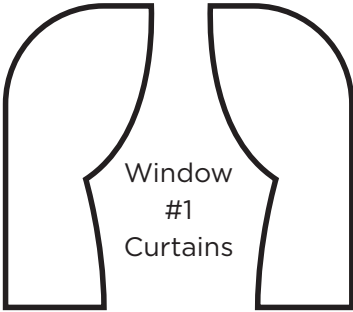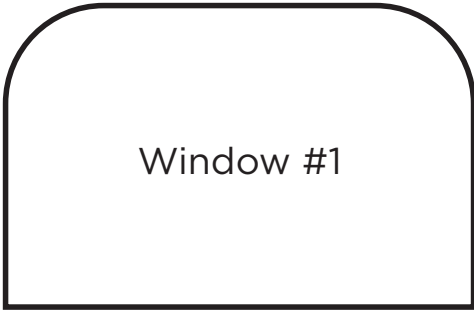

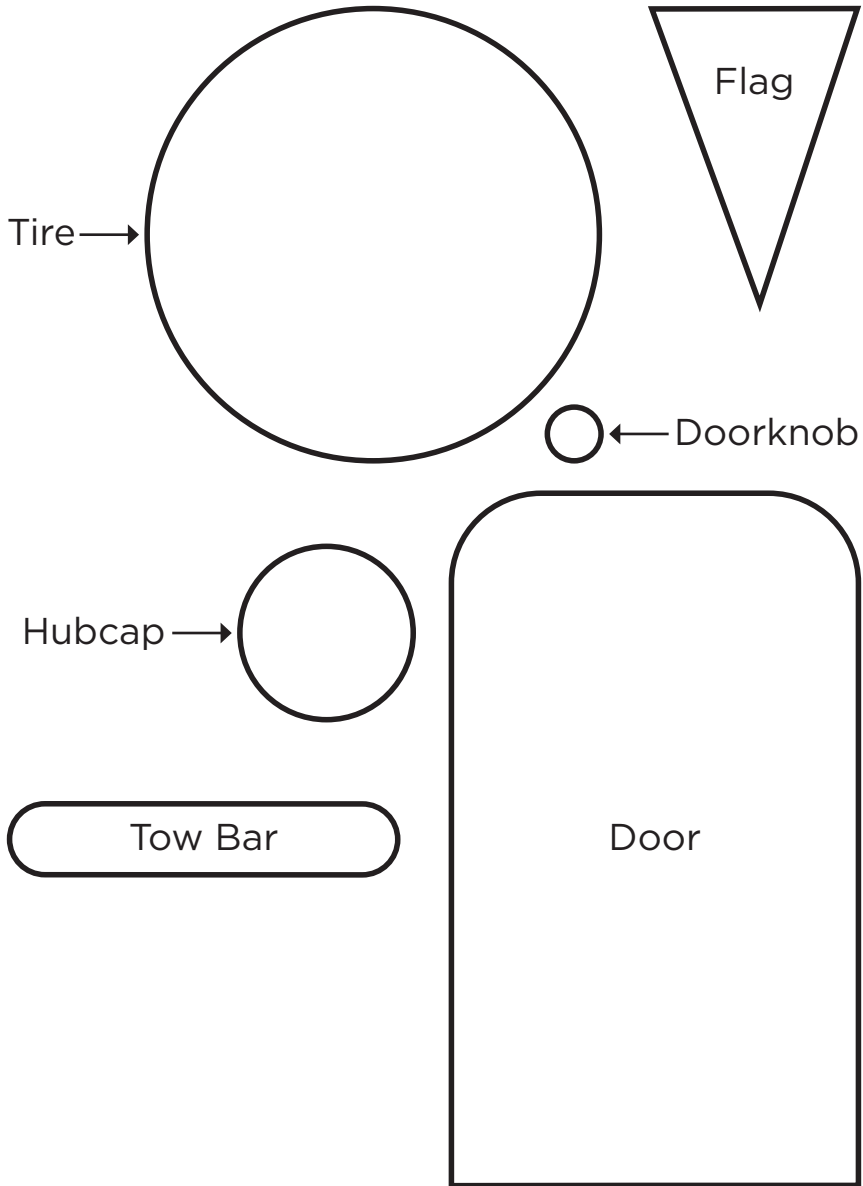

additional resources

visit our online store:
contact us via email:
come see us:

www.missouriquiltco.com
info@missouriquiltco.com
114 north davis street
hamilton, missouri 64644

check out our video tutorials:

youtube.com/missouriquiltco

Construction Basics

general quilting

- All seams are $\frac{1}{4}$ " unless directions specify differently.
- Precuts are not prewashed, so do not prewash other fabrics in the project.
- Remove all selvages.

press seams

- Set the temperature of the iron on the cotton setting.
- Set the seam by pressing it just as it was sewn, right sides together.
- Place the darker fabric on top, lift, and press back.
- Press seam allowances toward the borders unless directed otherwise.

borders


- Always measure the quilt top in 3 different places vertically before cutting side borders.
- Start measuring about 4" in from the top and bottom.
- Take the average of those 3 measurements.
- Cut 2 border strips to that size. Piece strips together if needed.
- Attach 1 to either side of the quilt. Position the border fabric on top as you sew to prevent waviness and to keep the quilt straight.
- Repeat this process for the top and bottom borders, measuring the width 3 times. Include the newly attached side borders in your measurements.

backing

- Measure the quilt top vertically and horizontally. Add 8" to both measurements to make sure

you have an extra 4" all the way around to make allowance for the fabric that is taken up in the quilting process as well as having adequate fabric for the quilting frame.

- Trim off all selvages and use a $\frac{1}{2}$ " seam allowance when piecing the backing. Sew the pieces together along the longest edge. Press the seam allowance open to decrease bulk.
- Use horizontal seams for smaller quilts (under 60" wide), vertical seams for larger quilts.
- Don't hesitate to cut a length of fabric in half along the fold line if it means saving fabric and makes the quilt easier to handle.
- Choose a backing layout that best suits your quilt. Note: large quilts might require 3 lengths.

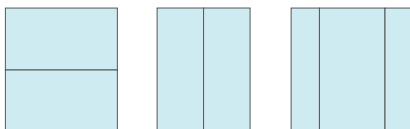

binding


find a video tutorial at: www.msqc.co/006

- Use $2\frac{1}{2}$ " strips for binding.
- Sew strips together end-to-end into 1 long strip using diagonal seams, a.k.a. plus sign method (next). Press seams open.
- Fold in half lengthwise with wrong sides together and press.
- The entire length should equal the outside dimension of the quilt plus 15" - 20".



plus sign method

find a video tutorial at: www.msqc.co/001

- Lay 1 strip across the other as if to make a plus sign right sides together.
- Sew from top inside to bottom outside corners crossing the intersections of fabric as you sew. Trim the excess fabric $\frac{1}{4}$ " away from the sewn seam.
- Press seam(s) open.

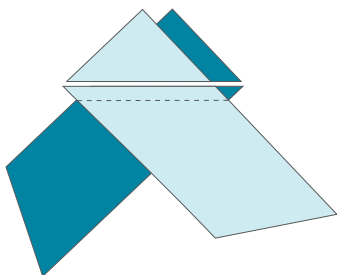

- The fold will lie along the edge just completed.
- Begin sewing on the fold.



attach binding

- Match raw edges of the folded binding to 1 edge of the top of the quilt.
- Leave a 10" tail at the beginning.
- Use a $\frac{1}{4}$ " seam allowance.
- Start sewing in the middle of a long straight side.

miter corners

- Stop sewing $\frac{1}{4}$ " before the corner.
- Move the quilt out from under the presser foot.
- Flip the binding up at a 90° angle to the edge just sewn.
- Fold the binding down along the next side to be sewn, aligning raw edges.

close binding

- Stop sewing when you have 12" left to reach the start.
- Where the binding tails come together, trim excess leaving only $2\frac{1}{2}$ " of overlap.
- Pin or clip the quilt together at the 2 points where the binding starts and stops to take the pressure off of the binding tails.
- Use the plus sign method to sew the 2 binding ends together, except this time, match the edges. Using a pencil, mark your sewing line and stitch.
- Trim off excess; press the seam open.
- Fold in half with wrong sides together and align all raw edges to the quilt top.
- Sew this last binding section to the quilt. Press.
- Turn the folded edge of the binding around to the back of the quilt and tack in place with an invisible stitch or machine stitch.

Cute Camper

PAT2782

SAMPLE QUILT

Cassandra by Studio RK for Robert Kaufman Fabrics
Kona Cotton - White by Robert Kaufman Fabrics

QUILT SIZE

54" x 64½"

BLOCK SIZE

10" unfinished, 9½" finished

QUILT TOP

1 package 10" print squares
1 package 10" background squares
¼ yard black fabric
¼ yard gray fabric
¾ yards sashing fabric
- includes inner border

OUTER BORDER

1¼ yards

BINDING

¾ yard

BACKING

3½ yards - horizontal seam(s)

OTHER

3 yards - Heat n Bond Lite



MISSOURI STAR
— QUILT CO. —

Cute Camper™ ©2019 All Rights Reserved by Missouri Star Quilt Company. Reproduction in whole or in part in any language without written permission from Missouri Star Quilt Company is prohibited. No one may copy, reprint or distribute any of this pattern for commercial use without written permission of Missouri Star Quilt Company. Anything you make using our patterns or ideas is your business, do whatever you want with the stuff you make, it's yours!

